



# IHC3000A

2000 MHz – 4000 MHz HYBRID COUPLER, 90 DGREE, 10 W

REV A  
March 2014

## Key Features



- Wide Band, 2000 MHz ~ 4000 MHz
- Low Insertion Loss, 0.5 dB Typ.
- High Isolation, 18 dB min
- Excellent VSWR 1.22:1 Typ.
- 90 Degree Hybrid, SMA Connector
- Build-in DC Block Capacitors
- Precision Machined Housing
- Meet MIL-STD-202g

## Applications

- Balance Wide Band Power Amplifier
- PCS, 3G, ISM, C Bands
- RF Bench Tests
- Wireless Applications



## Absolute Maximum Ratings

Parameters	Units	Ratings
Input Power(at Port 1) CW	W	10
Storage Temperature	°C	-40 ~ +85
Operating Temperature	°C	-40 ~ +85


Operation of this device beyond any one of these parameters may cause permanent damage.

## Specifications


Summary of the key electrical specifications at 25°C

Index	Testing Item	Symbol	Test Constraints	Min	Typ	Max	Unit
1	Frequency Range	BW	50 Ohm Impedance	2000		4000	MHz
2	Insertion Loss	$S_{21}$	2000 – 4000 MHz, above 3 dB		0.5	1.2	dB
3	VSWR	$SWR_i$	2000 – 4000 MHz, all Ports		1.22:1	1.5:1	Ratio
4	Isolation	$S_{23}$	2000 – 4000 MHz, 50 Ohm Load at Port C	18	20		dB
5	Amplitude Unbalance	$S_{21} - S_{31}$	2000 – 4000 MHz			1.3	dB
6	Phase Offset	$S_{21} - S_{31}$	2000 – 4000 MHz	85	90	95	Deg
7	Power Handling	$P_{MAX}$	2000 – 4000 MHz, CW			10	W
8	Operating Temperature	$T_o$		-40		+85	°C

## Functional Block Diagram

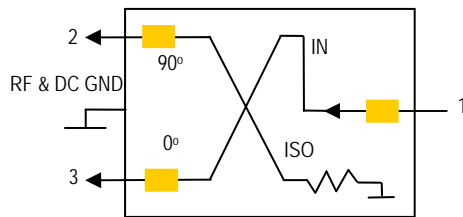

## Outline, IP-1 Housing

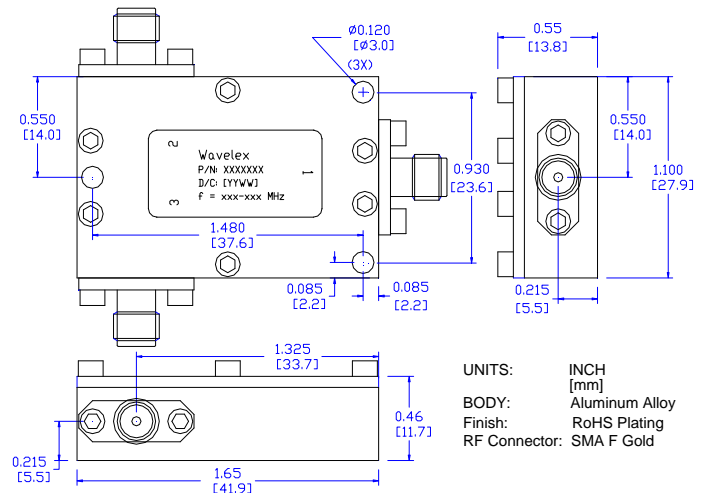





## Ordering Information

Model Number	Connectors	
	IN	OUT
IHC3000A	SMA Female	SMA Female

Specifications and information are subject to change without notice.



**Typical Data**

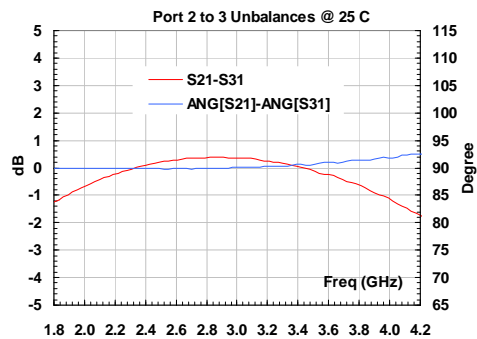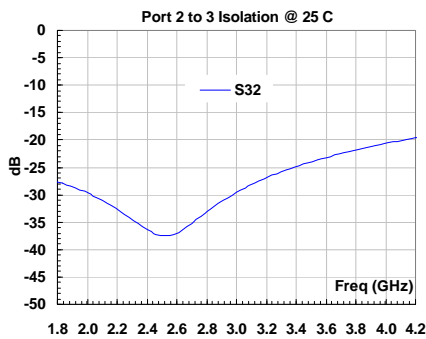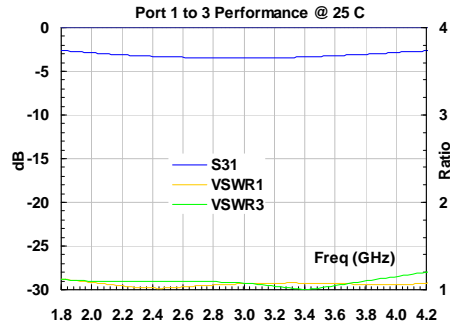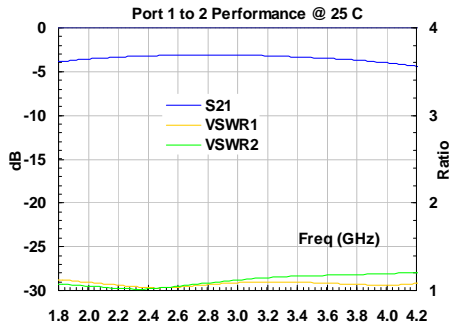

**Application Notes:**

**A. SMA Torque Wrench Selection**

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the ideal torque wrench choice from Agilent Technology.

**B. Mounting the Amplifier**

Use three pieces of #2-56 with longer than 9/16" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them.

\*\*\*\*\*

Specifications and information are subject to change without notice.