



IPA093096B

925-960 MHz 25W Power Amplifier

REV A
July 2014


Key Features

- 50 Ohm Impedance
- 925-960 MHz
- 57% Power Added Efficiency
- 35 dB Gain
- 44.0 dBm P_{sat}
- 55.0 dBm Output IP_3
- 1.22:1 VSWR
- 5.3dB Noise Figure
- Unconditional Stable
- Infinite Load VSWR Protection
- Single Power Supply
- RoHS Compliant



Applications

- Cellular, GSM
- Mobile Infrastructures
- Fixed Wireless

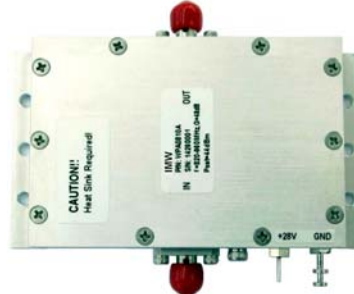

Absolute Maximum Ratings

Parameters	Units	Rating
DC Power Supply Voltage	V	30
Drain Current, CW	A	2.5
Total Power Dissipation	W	70
RF Input Power, CW	dBm	30
Storage Temperature	°C	-40 ~ +85
Operating Temperature	°C	-20 ~ +85
Thermal Resistance	°C/W	1.3


Operation of this device above any one of these parameters may cause permanent damage.

Ordering Information

Model Number	IPA093096B
--------------	------------

Additional heat sink is required for continuous operation!

Functional Block Diagram



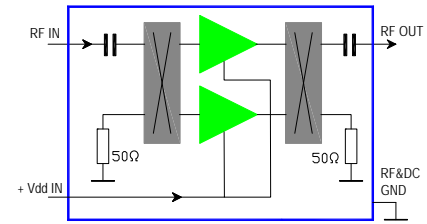


Specifications

Summary of the electrical specifications IPA093096B at room temperature

Index	Testing Item	Symbol	Test Constraints	Min	Normal	Max	Unit
1	Frequency Range	BW	50 Ohm Impedance	925		960	MHz
2	Small Signal Gain	S_{21}	925 – 960 MHz	34.0	35.0	36.0	dB
3	Gain Variation	ΔG	925 – 960 MHz		+/-0.25	+/- 0.5	dB
4	Output Saturated Power	P_{sat}	925 – 960 MHz	43	44		dBm
5	Input Return Loss	S_{11}	925 – 960 MHz	16	20		dB
6	Output Return Loss	S_{22}	925 – 960 MHz	16	20		dB
7	Reverse Isolation	S_{12}	925 – 960 MHz		60		dB
8	Noise Figure	NF	925 – 960 MHz		5.3		dB
9	Output-Third-Order Interception point	IP_3	Two-Tone, $P_{out} = 33$ dBm each, 1 MHz separation	52	55		dBm
10	DC Power Added Efficiency	η	$P_o=25W$	52	57		%
11	Current Consumption	I_{dd}	$V_{dd}= +28$ V, 0.300 A quiescent DC bias			2.5	A
12	Power Supply Voltage	V_{dd}		26	28	30	V
13	Operating Temperature	T_o		-20		+70	°C
14	Thermal Resistance	$R_{th,c}$				1.3	°C/W
15	Maximum Average RF Input Power	$P_{IN,MAX}$	DC – 6 GHz			30	dBm

Typical Performance

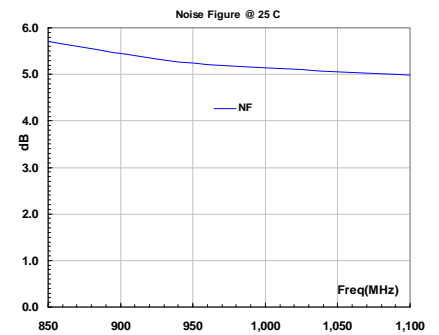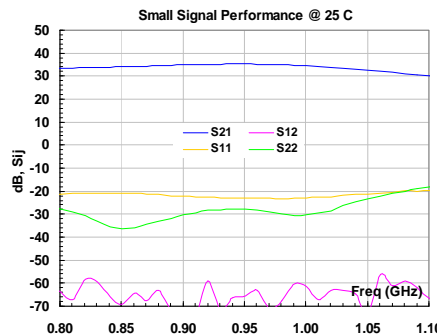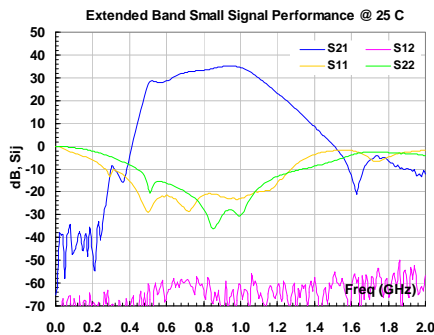






Specifications and information are subject to change without notice.



IPA093096B

925-960 MHz 25W Power Amplifier

REV A
July 2014

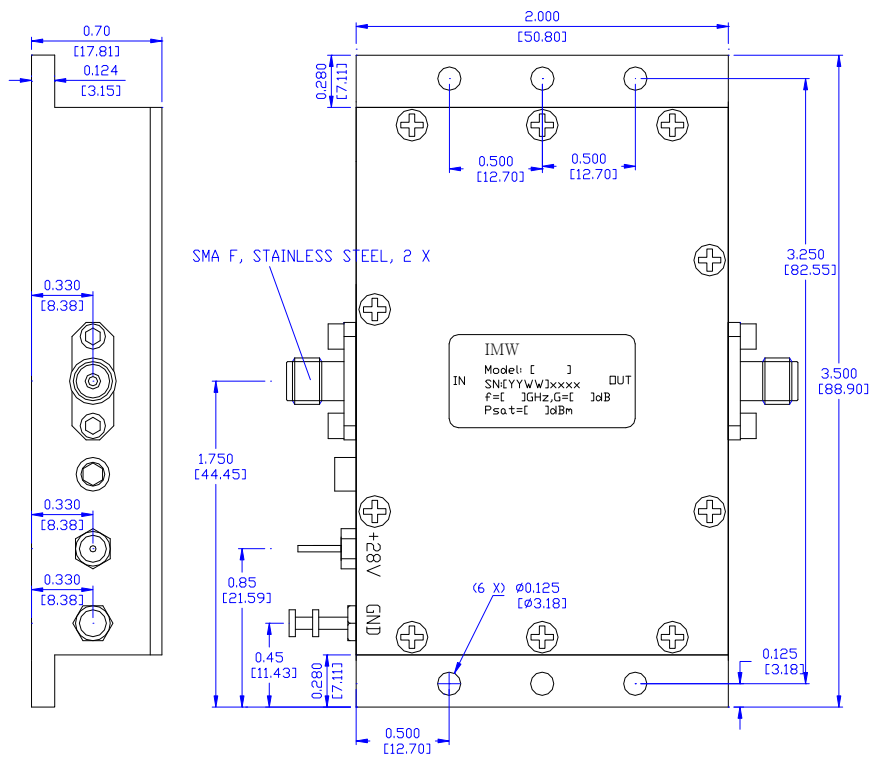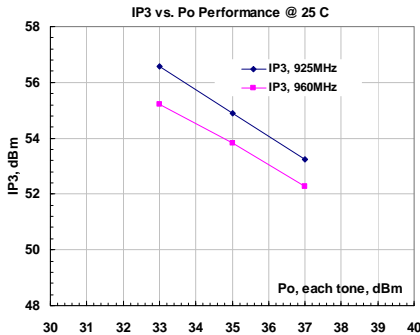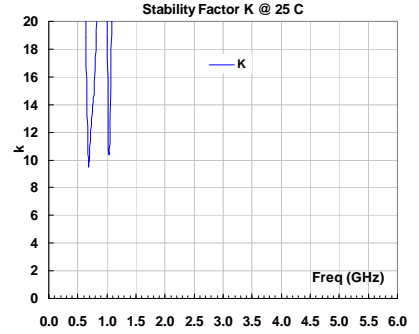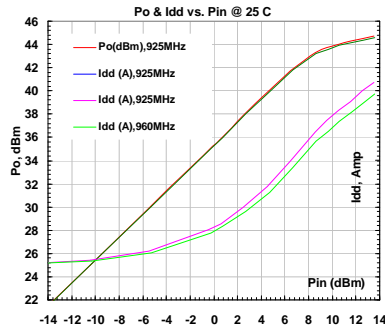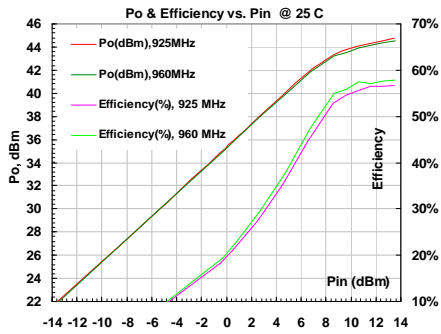

Outline, WP-1M Housing

Units: INCH [mm]
Body: Aluminum Alloy
Finish: Clear Plating
RF Connector: SMA F Stainless
+28V DC I/O: Feedthru

Application Notes:

A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the ideal torque wrench choice from Agilent Technology.

B. Mounting the Amplifier

Use six pieces of #4-40 with longer than 3/8" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them. Proper heat sink is required for continuous operation.

Specifications and information are subject to change without notice.